



# **CO-CF Carbon Monoxide Sensor**



< 8

### 

Top View	В	ottom View Side V	/iew -	
PERFORMANCE	Sensitivity Response time Zero current Resolution Range Linearity Overgas limit	nA/ppm in 400ppm CO t <sub>90</sub> (s) from zero to 400ppm CO ppm equivalent in zero air RMS noise (ppm equivalent) ppm CO limit of performance warranty ppm CO error at full scale, linear at zero, 1000ppm CO maximum ppm for stable response to gas pulse		55 to 90 < 30 < -4 to +2 < 0.5 5,000 < ± 30 20,000
LIFETIME	Zero drift Sensitivity drift Operating life	ppm equivalent change/year in lab air % change/year in lab air, monthly test months until 80% original signal (24 month warranted)		< 0.2 < 8 > 24
ENVIRONMENTA	LSensitivity @ -20°C Sensitivity @ 50°C Zero @ -20°C Zero @ 50°C	C % (output @ -20°C/output @ 20°C) @ 400ppm CO % (output @ 50°C/output @ 20°C) @ 400ppm CO ppm equivalent change from 20°C ppm equivalent change from 20°C		63 to 85 102 to 115 < ± 3 < ± 8
CROSS SENSITIVITY	Filter capacity Filter capacity Filter capacity Filter capacity Filter capacity H <sub>2</sub> S sensitivity NO <sub>2</sub> sensitivity Cl <sub>2</sub> sensitivity NO sensitivity SO <sub>2</sub> sensitivity H <sub>2</sub> sensitivity H <sub>2</sub> sensitivity C <sub>2</sub> H <sub>4</sub> sensitivity NH <sub>3</sub> sensitivity	ppm·hours ppm-hours ppm-hours ppm-hours % measured gas @ 20ppm % measured gas @ 10ppm % measured gas @ 10ppm % measured gas @ 50ppm % measured gas @ 20ppm % measured gas @ 400ppm % measured gas @ 400ppm % measured gas @ 20ppm % measured gas @ 20ppm	$\begin{array}{c} {\rm H_2S} \\ {\rm NO_2} \\ {\rm NO} \\ {\rm SO_2} \\ {\rm H_2S} \\ {\rm NO_2} \\ {\rm Cl_2} \\ {\rm NO} \\ {\rm SO_2} \\ {\rm H_2 at  20^{\circ}C} \\ {\rm C_2H_4} \\ {\rm NH_3} \end{array}$	250,000 600,000 400,000 300,000 < 0.1 < 0.1 < 0.1 < 0.1 < 45 < 2 < 0.1
KEY SPECIFICATIONS	Temperature range Pressure range Humidity range Storage period Load resistor	°C kPa % rh continuous months @ 3 to 20°C (stored in Ω (recommended)	n sealed pot)	-30 to 50 80 to 120 15 to 90 6 10 to 47



Weight

At the end of the product's life, do not dispose of any electronic sensor, component or instrument in the domestic waste, but contact the instrument manufacturer, Alphasense or its distributor for disposal instructions.

**NOTE:** all sensors are tested at ambient environmental conditions, with 10 ohm load resistor, unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.





## **CO-CF Performance Data**

#### **Figure 2 Sensitivity Temperature Dependence**

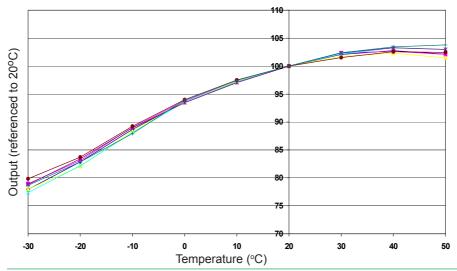


Figure 2 shows the variation in sensitivity caused by changes in temperature.

This data is taken from a typical batch of sensors.

#### **Figure 3 Zero Temperature Dependence**

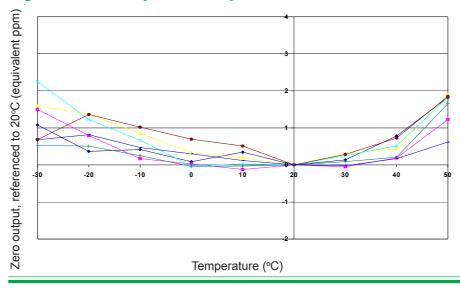


Figure 3 shows the variation in zero output caused by changes in temperature, expressed as ppm gas equivalent, referenced to zero at 20°C.

This data is taken from a typical batch of sensors.

#### Figure 4 Response to Exposure to 2% CO

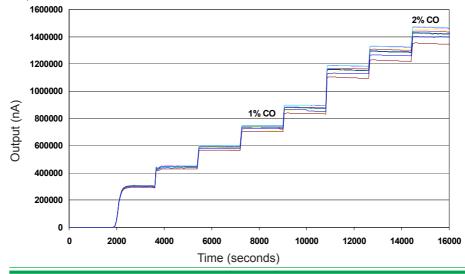


Figure 4 shows the excellent response to step changes in CO concentrations from zero to 2% CO by volume.

This data is taken from a typical batch of sensors.

For further information on the performance of this sensor, on other sensors in the range or any other subject, please contact Alphasense Ltd. For Application Notes visit "www.alphasense.com"

In the interest of continued product improvement, we reserve the right to change design features and specifications without prior notification. The data contained in this document is for guidance only. Alphasense Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this document or the information contained within. (@ALPHASENSE LTD) Doc. Ref. COCF/JAN15