

## Ultra High-Speed Photoreceiver with InGaAs-PIN Photodiode




The picture shows the HSPR-X-I-2G-IN-FS with free space input. The photoreceiver will be delivered without post holder and post.

Features	<ul style="list-style-type: none"> <li>• <b>Bandwidth 10 kHz ... 2 GHz</b></li> <li>• <b>InGaAs-PIN detector</b></li> <li>• <b>Spectral range 900 ... 1700 nm</b></li> <li>• <b>Amplifier transimpedance (gain) <math>5 \times 10^3</math> V/A (inverting)</b></li> <li>• <b>Conversion gain <math>4.75 \times 10^3</math> V/W @ 1550 nm</b></li> </ul>																																																				
Applications	<ul style="list-style-type: none"> <li>• <b>Spectroscopy</b></li> <li>• <b>Ultra-fast pulse and transient measurements</b></li> <li>• <b>Optical triggering</b></li> <li>• <b>Optical front-end for oscilloscopes and ultra-fast A/D converters</b></li> </ul>																																																				
Specifications	<table border="0"> <tr> <td>Test conditions</td> <td colspan="3"><math>V_s = +15</math> V, <math>T_A = 25</math> °C, system impedance = 50 <math>\Omega</math></td> </tr> <tr> <td>Gain</td> <td>Amplifier transimpedance</td> <td><math>5 \times 10^3</math> V/A</td> <td>(@ 50 <math>\Omega</math> load, inverting)</td> </tr> <tr> <td></td> <td>Conversion gain</td> <td><math>4.75 \times 10^3</math> V/W</td> <td>(typ. @ 1550 nm)</td> </tr> <tr> <td>Frequency Response</td> <td>Lower cut-off frequency (-3 dB)</td> <td>10 kHz</td> <td>(<math>\pm 25</math> %)</td> </tr> <tr> <td></td> <td>Upper cut-off frequency (-3 dB)</td> <td>2 GHz</td> <td>(<math>\pm 15</math> %)</td> </tr> <tr> <td></td> <td>Rise/fall time (10 % - 90 %)</td> <td>180 ps</td> <td>(<math>\pm 15</math> %)</td> </tr> <tr> <td>Input/Detector</td> <td>Detector material</td> <td colspan="2">InGaAs-PIN photodiode</td> </tr> <tr> <td></td> <td>Active area</td> <td>FS-version:</td> <td><math>\varnothing</math> 100 <math>\mu</math>m</td> </tr> <tr> <td></td> <td></td> <td>FC-version:</td> <td>integrated ball lens, suitable for fibers up to 62.5 <math>\mu</math>m core diameter</td> </tr> <tr> <td></td> <td>Spectral range</td> <td colspan="2">900 ... 1700 nm</td> </tr> <tr> <td></td> <td>Max. optical peak input power</td> <td>210 <math>\mu</math>W AC</td> <td>(for linear amplification, @ 1550 nm)</td> </tr> <tr> <td></td> <td></td> <td>10 mW CW</td> <td>(to prevent saturation, @ 1550 nm)</td> </tr> <tr> <td>Noise</td> <td>NEP</td> <td>11 pW/<math>\sqrt</math>Hz</td> <td>(@ 1550 nm, 100 MHz)</td> </tr> </table>	Test conditions	$V_s = +15$ V, $T_A = 25$ °C, system impedance = 50 $\Omega$			Gain	Amplifier transimpedance	$5 \times 10^3$ V/A	(@ 50 $\Omega$ load, inverting)		Conversion gain	$4.75 \times 10^3$ V/W	(typ. @ 1550 nm)	Frequency Response	Lower cut-off frequency (-3 dB)	10 kHz	( $\pm 25$ %)		Upper cut-off frequency (-3 dB)	2 GHz	( $\pm 15$ %)		Rise/fall time (10 % - 90 %)	180 ps	( $\pm 15$ %)	Input/Detector	Detector material	InGaAs-PIN photodiode			Active area	FS-version:	$\varnothing$ 100 $\mu$ m			FC-version:	integrated ball lens, suitable for fibers up to 62.5 $\mu$ m core diameter		Spectral range	900 ... 1700 nm			Max. optical peak input power	210 $\mu$ W AC	(for linear amplification, @ 1550 nm)			10 mW CW	(to prevent saturation, @ 1550 nm)	Noise	NEP	11 pW/ $\sqrt$ Hz	(@ 1550 nm, 100 MHz)
Test conditions	$V_s = +15$ V, $T_A = 25$ °C, system impedance = 50 $\Omega$																																																				
Gain	Amplifier transimpedance	$5 \times 10^3$ V/A	(@ 50 $\Omega$ load, inverting)																																																		
	Conversion gain	$4.75 \times 10^3$ V/W	(typ. @ 1550 nm)																																																		
Frequency Response	Lower cut-off frequency (-3 dB)	10 kHz	( $\pm 25$ %)																																																		
	Upper cut-off frequency (-3 dB)	2 GHz	( $\pm 15$ %)																																																		
	Rise/fall time (10 % - 90 %)	180 ps	( $\pm 15$ %)																																																		
Input/Detector	Detector material	InGaAs-PIN photodiode																																																			
	Active area	FS-version:	$\varnothing$ 100 $\mu$ m																																																		
		FC-version:	integrated ball lens, suitable for fibers up to 62.5 $\mu$ m core diameter																																																		
	Spectral range	900 ... 1700 nm																																																			
	Max. optical peak input power	210 $\mu$ W AC	(for linear amplification, @ 1550 nm)																																																		
		10 mW CW	(to prevent saturation, @ 1550 nm)																																																		
Noise	NEP	11 pW/ $\sqrt$ Hz	(@ 1550 nm, 100 MHz)																																																		

## Ultra High-Speed Photoreceiver with InGaAs-PIN Photodiode

Specifications (continued)		
Output	Output impedance	50 Ω (designed for 50 Ω load)
	Output VSWR	1.4 : 1 (@ f < 2.5 GHz)
	Output return loss	15.5 dB (@ f < 2.5 GHz)
	Max. output voltage	2.0 V <sub>PP</sub> (@ 50 Ω load, for linear amplification)
	Output noise	typ. 2.5 mV <sub>RMS</sub> or 17 mV <sub>PP</sub> * (measurement BW: 4 GHz)
	* The peak-to-peak output noise is derived from the RMS noise as follows: V <sub>PP</sub> = V <sub>RMS</sub> × 6.6 (99.9% of the time the output noise voltage will be within the specified peak-to-peak value.)	
Power Supply	Supply voltage	+15 V, 150 mA typ. (depends on operating conditions, recommended power supply capability minimum 200 mA)
Case	Weight	100 g (0.23 lbs)
	Material	AlMg4.5Mn, nickel-plated
Temperature Range	Storage temperature	-40 ... +100 °C
	Operating temperature	0 ... +60 °C

Absolute Maximum Ratings	Power supply voltage	±18.5 V
	Optical input power	12 mW (averaged)

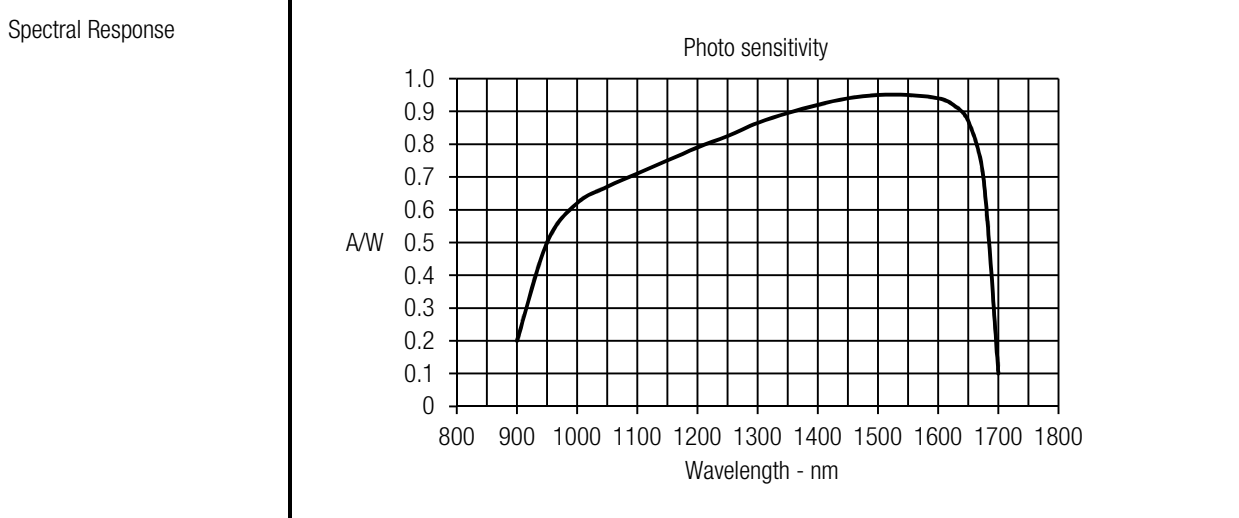

Connectors	Input	HSPR-X-I-2G-IN-FS	25 mm round flange for free space applications
		HSPR-X-I-2G-IN-FC	FC fiber optic receptacle
	Output	SMA jack (female)	
	Power supply	Lemo® series 1S, 3-pin fixed socket (mating plug type: FFA.1S.303.CLAC52)	
		Pin 1:	+15 V
		Pin 2:	NC
		Pin 3:	GND

**Ultra High-Speed Photoreceiver  
with InGaAs-PIN Photodiode**

Available Models	HSPR-X-I-2G-IN-FS HSPR-X-I-2G-IN-FC HSPR-X-S	free space input fiber optic receptacle customized versions available on request
------------------	--	--

Dimensions	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>HSPR-X-I-2G-IN-FS</p> </div> <div style="text-align: center;"> <p>HSPR-X-I-2G-IN-FC</p> </div> </div> <p style="text-align: right; margin-top: 10px;">All measures in mm unless otherwise noted.</p>	
------------	---	--

FEMTO Messtechnik GmbH  
 Klosterstr. 64  
 10179 Berlin · Germany  
 Phone: +49 30 280 4711-0  
 Fax: +49 30 280 4711-11  
 Email: info@femto.de  
 www.femto.de

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH · Printed in Germany