

1.1.1.2 Round Photodiode Sensors

20pW to 3W

Features

- Round geometry for easy centering
- Threaded to fit standard SM1 bench equipment
- Same performance as standard PD300 sensors
- Comes with removable filter as standard
- Fiber optic adapters available

PD300R Filter Off




PD300R Filter installed




Model	PD300R			PD300R-3W			PD300R-UV			PD300R-IR					
Use	General			Powers to 3W			Lowest powers from 200-1100nm			IR wavelengths 700-1800nm					
Detector Type	silicon			silicon			silicon			germanium					
Aperture	Ø10mm			Ø10mm			Ø10mm			Ø5mm					
Filter mode	Filter out	Filter in		Filter out	Filter in		Filter out	Filter in		Filter out	Filter in				
Spectral Range nm	350-1100	430-1100		350-1100	430-1100		200 -1100	220 -1100		700-1800	700-1800				
Power Range	500pW to 30mW	200µW to 300mW		5nW to 100mW	200µW to 3W		20pW to 3mW	2µW to 300mW		5nW to 30mW	200µW to 300mW				
Power Scales	30mW to 30nW and dBm	300mW to 30mW and dBm		100mW to 300nW and dBm	3W to 30mW and dBm		3mW to 3nW and dBm	300mW to 300µW and dBm		30mW to 30nW and dBm	300mW to 30mW and dBm				
Resolution nW	0.01	NA		0.1	NA		0.001	100		0.01	NA				
Maximum Power vs. Wavelength	nm	mW	mW	nm	mW	mW	nm	mW	mW	nm	mW	mW			
	<488	30	300	<488	100	3000	250 - 350	3	300	800	12	120			
	633	20	300	633	100	3000	400	3	300	1000-1300	30	300			
	670	13	200	670	100	2000	600	3	300	1400	30	250			
	790	10	100	790	100	1200	800 - 950	2.5	150	1500	30	100			
	904	10	100	904	100	1200	1064	3	300	1600	30	100			
	1064	25	250	1064	100	2200				1800	30	300			
Accuracy (including errors due to temp. variations)															
% error vs Wavelength nm	±10	360-400	NA	±10	360-400	NA	±10	200-230	±10	220-300	±5	700-800	±6	700-900	
	±3	400-980	±5	430-980	±3	400-950	±5	430-950	±7	230-300	±4	300-420	±4	800-1700	
	±5	980-1100	±7	980-1100	±4	950-1030	±6	950-1030	±3	300-420	±3	420-980	±7	1700-1800	
						±6	1030-1100	±7	1030-1100	±2	420-980	±7	980-1100	±9	1700-1800
									±7	980-1100					
Damage Threshold W/cm ²	10	50		10	30		10	50		10	50				
Max Pulse Energy µJ	2	20		20	500		0.4	15		0.3	3				
Noise Level for filter out pW	20			200			±1			200					
Response Time with Meter s	0.2			0.2			0.2			0.2					
Beam Position Dependence	±2%			±2%		±3%	±2%			±2%					
Fiber Adapters Available (see page 40)	ST, FC, SMA, SC			ST, FC, SMA, SC			ST, FC, SMA, SC			ST, FC, SMA, SC					
Compliance	CE, China RoHS			CE, China RoHS			CE, China RoHS			CE, China RoHS					
Version															
Part Number	7Z02436			7Z02437			7Z02438			7Z02439					

* For graphs see page 30-31

PD300R / PD300R-3W/ PD300R-UV

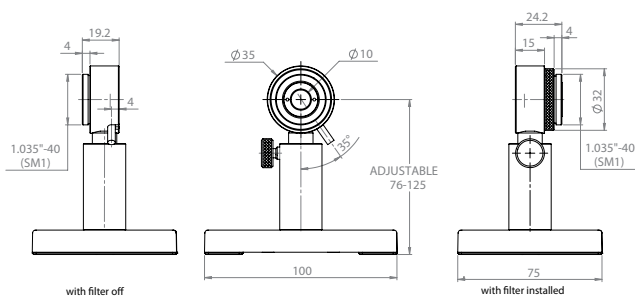


PD300R-IR

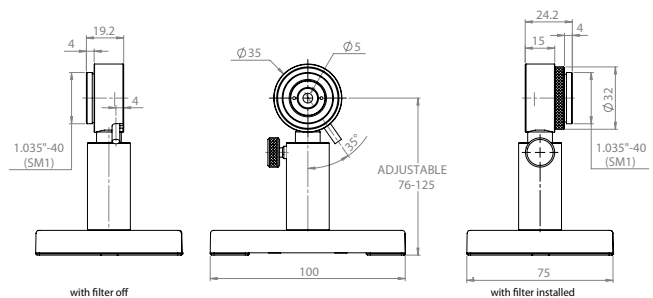


1.1.1.4 Graphs


Temperature Coefficient of Sensitivity

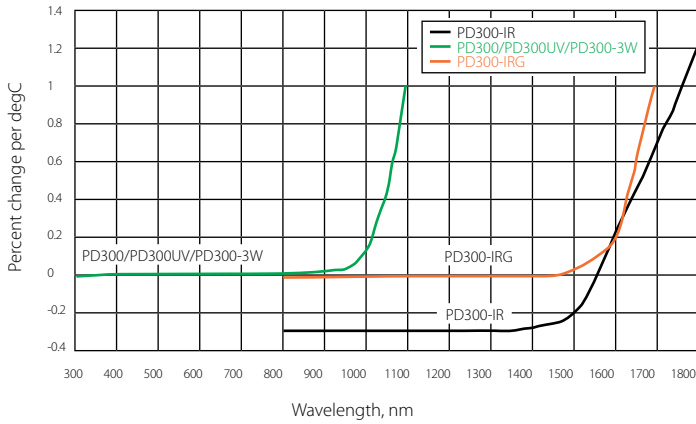

PD300 Angle Dependence

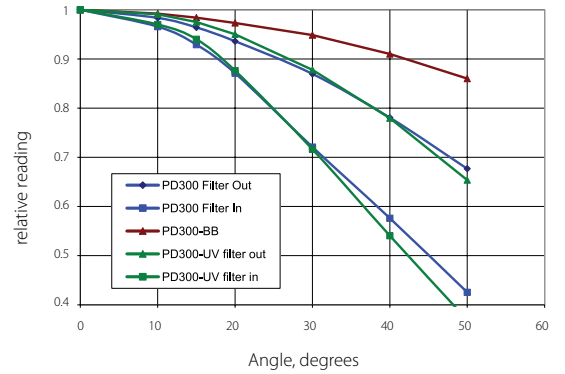


Dependence of Sensitivity on Numerical Aperture (PD300 - IRG)

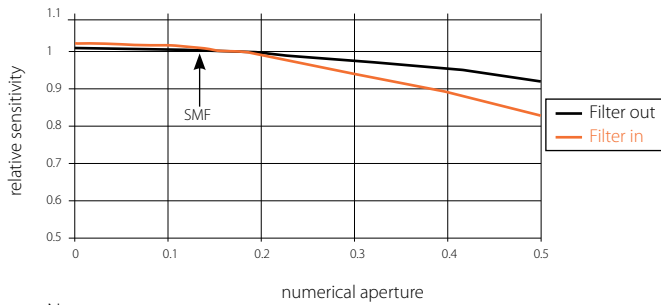


Note:

1. Graph assumes equal intensity into all angles up to maximum N.A.
2. Calibration is done with SMF, N.A. 0.13


PD300-CIE Spectral Response vs. CIE Curve

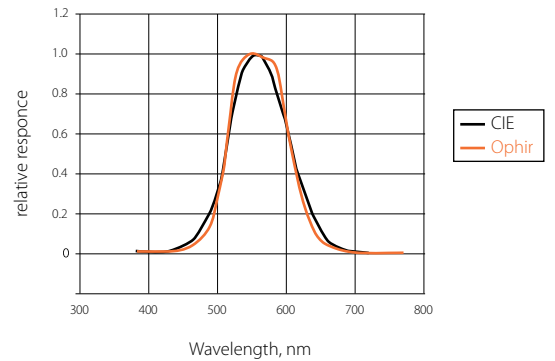

Typical Sensitivity Curve of PD300-BB Sensors

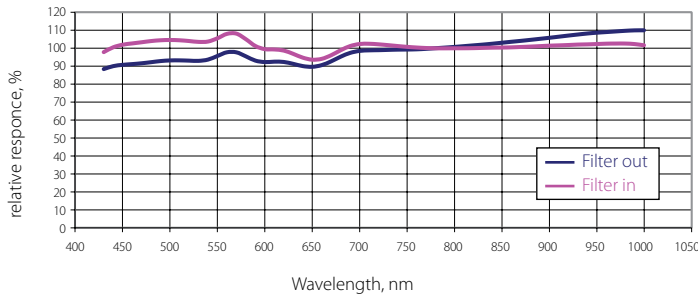


BC20 Relative Spectral Response

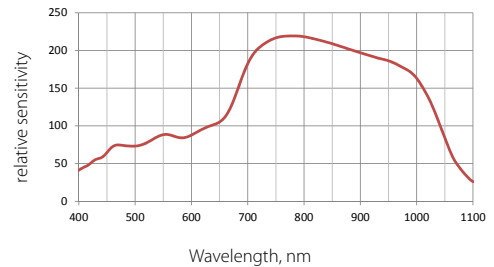


Approximate Spectral Response Relative to 633nm or 1550nm


PD300 / PD300R

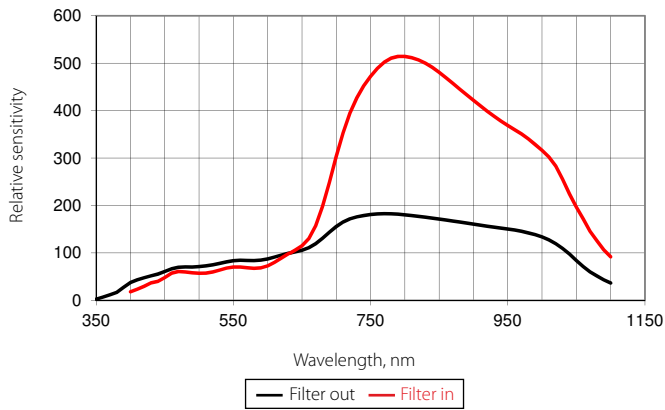


PD300-UV / PD300R-UV

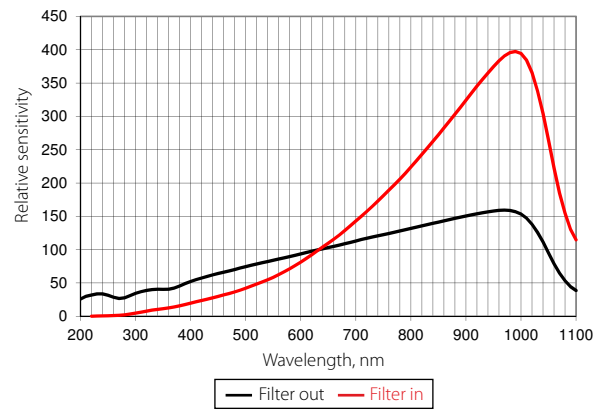


PD300-IR / PD300R-IR

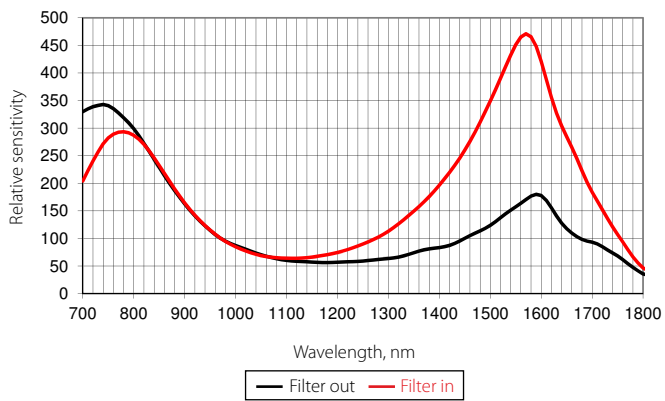

PD300-TP

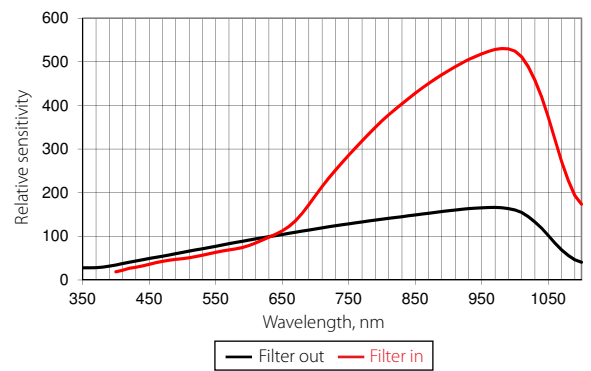

PD300-3W / PD300R-3W

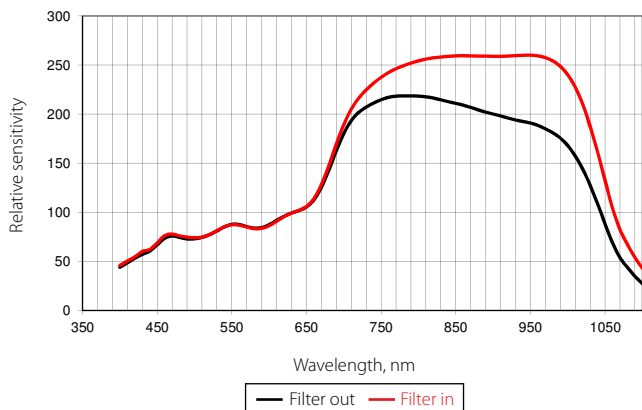

PD300-IRG

