


MODEL 2230 TRIAXIAL MOUNTING BLOCK



- Mix and Match up to 3 single axis modules in similar or different g-levels
- Rugged, black anodized, and precision machined 6061-T6 aluminum
- Block mass = 79 grams
- Included hex socket head cap screw fasteners:
 - One (1) 1/4-20x1.5" UNC (9.5 grams, 6 lb-ft)
 - One (1) M6x1x35mm (9.0 grams, 5 lb-ft)
 - Six (6) #4-40x1/2" (0.7 grams each, 4.9 in-lbs)

The 1.25", cube-shaped Model 2230 Block provides a lower cost alternative for configuring a custom orthogonal two or three axis accelerometer.

MODEL 2230 DIMENSIONS

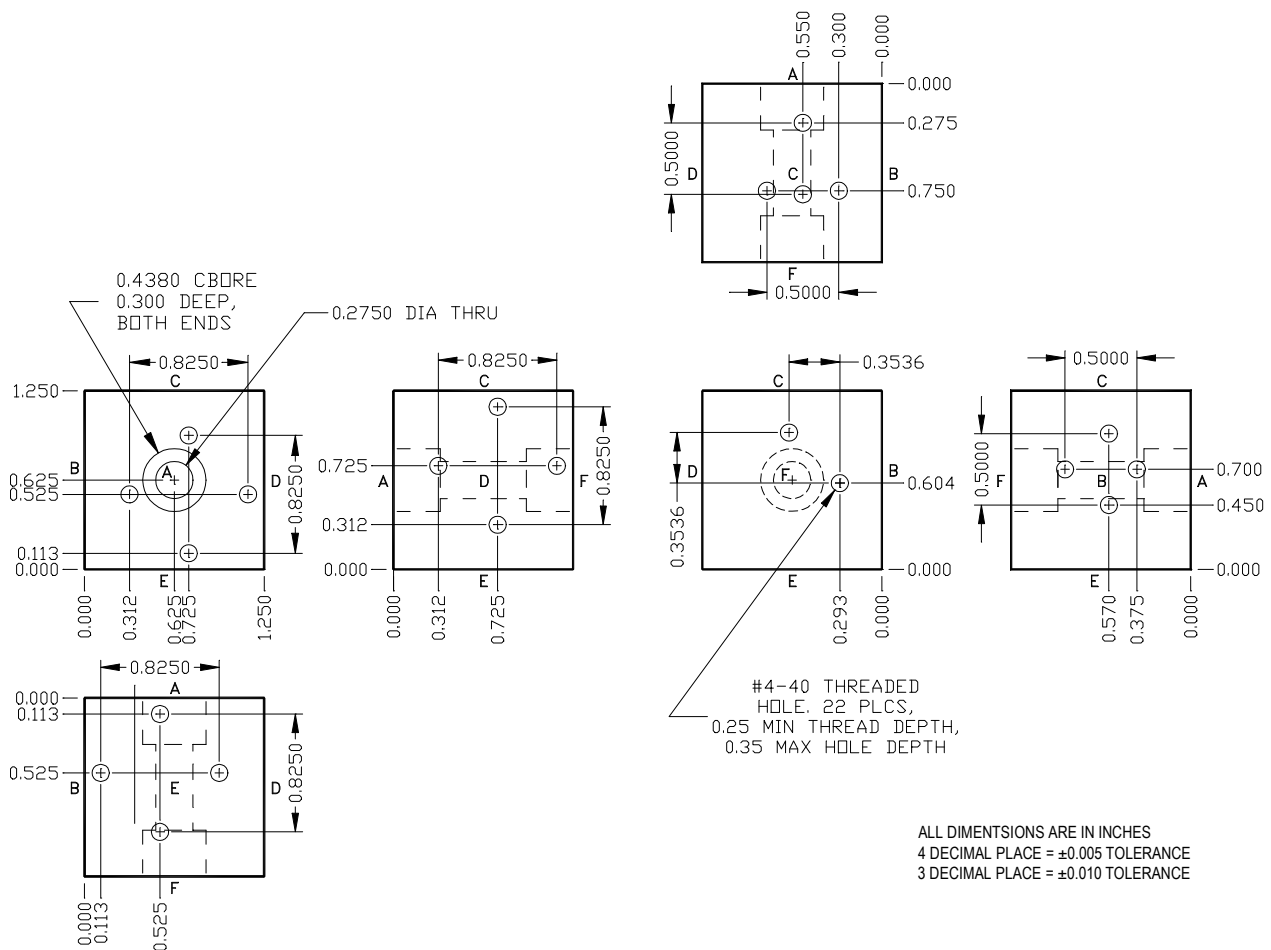

The #4-40x1/2" screws attach your accelerometer(s) to the block. The 1/4-20 or M6x1 screw attaches the block to your work surface.


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

MODEL 2235 STUD MOUNT BLOCK

- Adaptor to stud mount any SDI module
- Rugged black anodized aluminum
- Block mass = 6.2 grams
- Fasteners Included:
 - One (1) #10-32 Captive Screw (1.4 grams)
 - Three (3) #4-40x1/2" (0.7 grams each)



MODEL 2235 DIMENSIONS

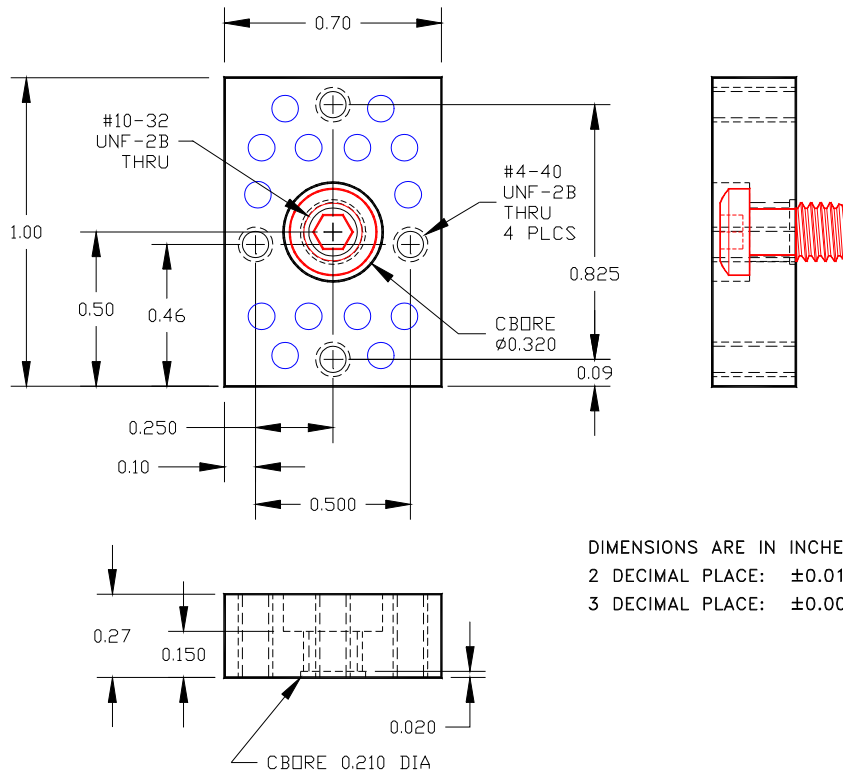

DIMENSIONS ARE IN INCHES
 2 DECIMAL PLACE: ±0.010 TOLERANCE
 3 DECIMAL PLACE: ±0.005 TOLERANCE